




CDRCW

DOUBLE ROW

HARD MATERIALS

Classic

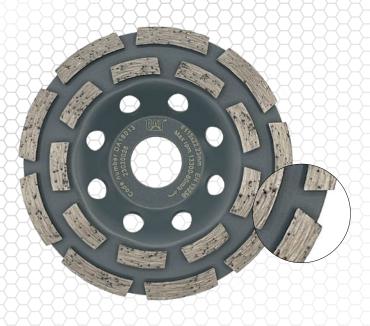



DRY GRINDING



WET GRINDING













The Classic range offers excellent grinding characteristics and offers great value throughout the range on specified materials. High output products that perform at the top of their class across a wide span of application. Manufactured using high quality diamond grit and bonding formulation. Great speed of grind and lifetime on a wide range of applications.

ATTRIBUTES

- **FAST AGGRESSIVE ACTION**
- FAST STOCK REMOVAL
- HIGH DIAMOND CONCENTRATION 30 / 40 # MESH GRIT
- BALANCED FOR LESS VIBRATION.

APPLICATION



CRITICALLY HARD AGGREGATE CONCRETE (FLINT, CHERT), HARD TO MEDIUM AGGREGATE CONCRETE (CHERT - TRAP ROCK - RIVER GRAVEL), MEDIUM AGGREGATE CONCRETE (TRAPROCK - QUARTZ), MEDIUM SOFT AGGREGATE CONCRETE (GRANITE LIMESTONE), CONCRETE KERBS, CONCRETE SLABS, HARD LIMESTONE, LIMESTONE AGGREGATE CONCRETE, CONCRETE PAVIOURS, CONCRETE PIPE, SOFT FACING BRICKS, CONCRETE ROOF TILE, SOFT FACING BRICKS, CONCRETE WITH MEDIUM SHARP SAND, CONCRETE SCREED, PLASTER - GROUT



GRANITE.QUARTZITE, CLASS A ENGINEERING BRICK 125 N/MM2, CLASS A ENGINEERING BRICK 125 N/MM2, REFRACTORY BRICK, HARD FACING BRICK TRAVERTINE, PORPHYRY, CLASS B ENGINEERING BRICK 75N/MM², MEDIUM FACING BRICK, HARD SLATE, RIVER GRAVEL CONCRETE, LIGHT REINFORCED CONCRETE, BASALT, LIGHT REINFORCED CONCRETE LINTELS, FIBRE CEMENT BOARD, CONCRETE BLOCKS OVER 15N/MM2, HARD SANDSTONE (FINE GRIT), SOFT SLATE, MARBLE, MEDIUM SANDSTONE (MEDIUM GRIT).



INDIAN STONE (KOTA), SOFT SANDSTONE (COARSE GRIT), CONCRETE BLOCK UNDER 15N/MM².



GREEN CONCRETE UNIVERSAL, GREEN CONCRETE WITH VERY HARD AGGREGATE, GREEN CONCRETE WITH MEDIUM HARD AGGREGATE, GREEN CONCRETE WITH MEDIUM SOFT AGGREGATE, LIGNACITE BLOCKS, LAVA ROCK, PUMICE.

PRODUCT TYPE		DIAMETER		SEGMENT HEIGHT		SEGMENT WIDTH		MAIN ARBOR - BORE		REDUCING RINGS INCLUDED		MACHINES USED
PART NO	CODE NO	ММ	INCH	ММ	INCH	ММ	INCH	ММ	INCH	ММ	INCH	
DA16013	CDRCW115	115	4 1/2	5	0.197	8	0.315	22.23	7/8	N/A	N/A	
DA16014	CDRCW125	125	5	5	0.197	8	0.315	22.23	7/8	N/A	N/A	




























©2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. C6 DIAMOND LLC, a licensee of Caterpillar Inc

SILICA DUST: Workers who are exposed to respirable crystalline silica dust are at increased risk of developing serious silica-related diseases. It is necessary to use saws and other machinery that is equipped with an integrated water delivery system that continuously feeds water to the blade. Operate and maintain all tools in accordance with manufacturer's instructions to minimize dust emissions and always wear the correct ventilator. For more info visit: www.osha.gov/sites/default/files/publications/OSHA3681.pdf